
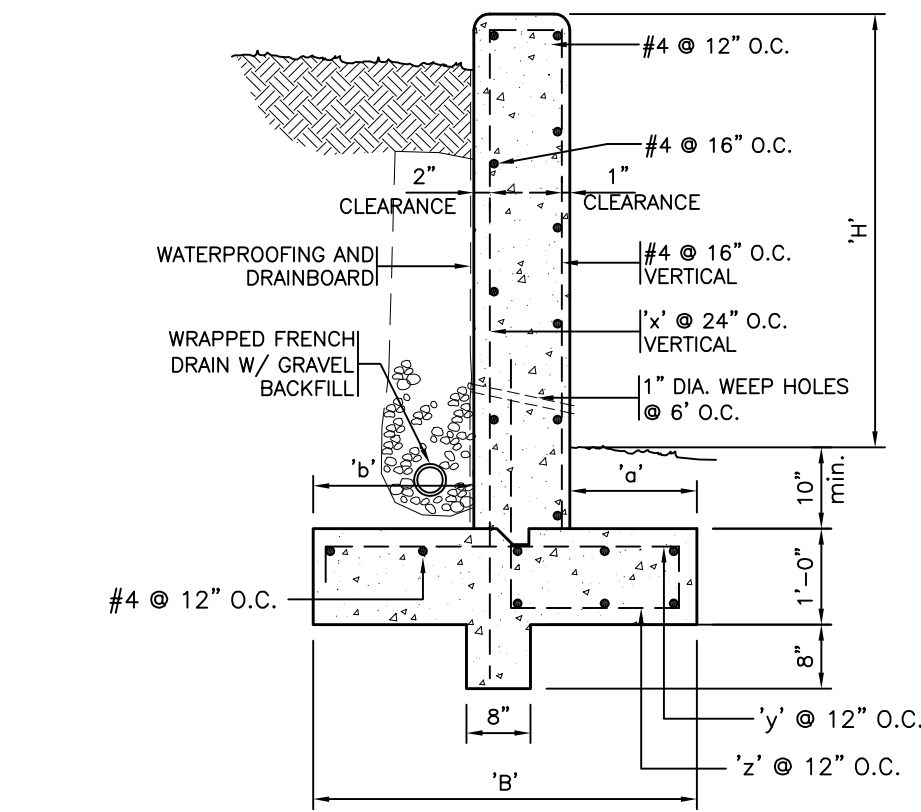
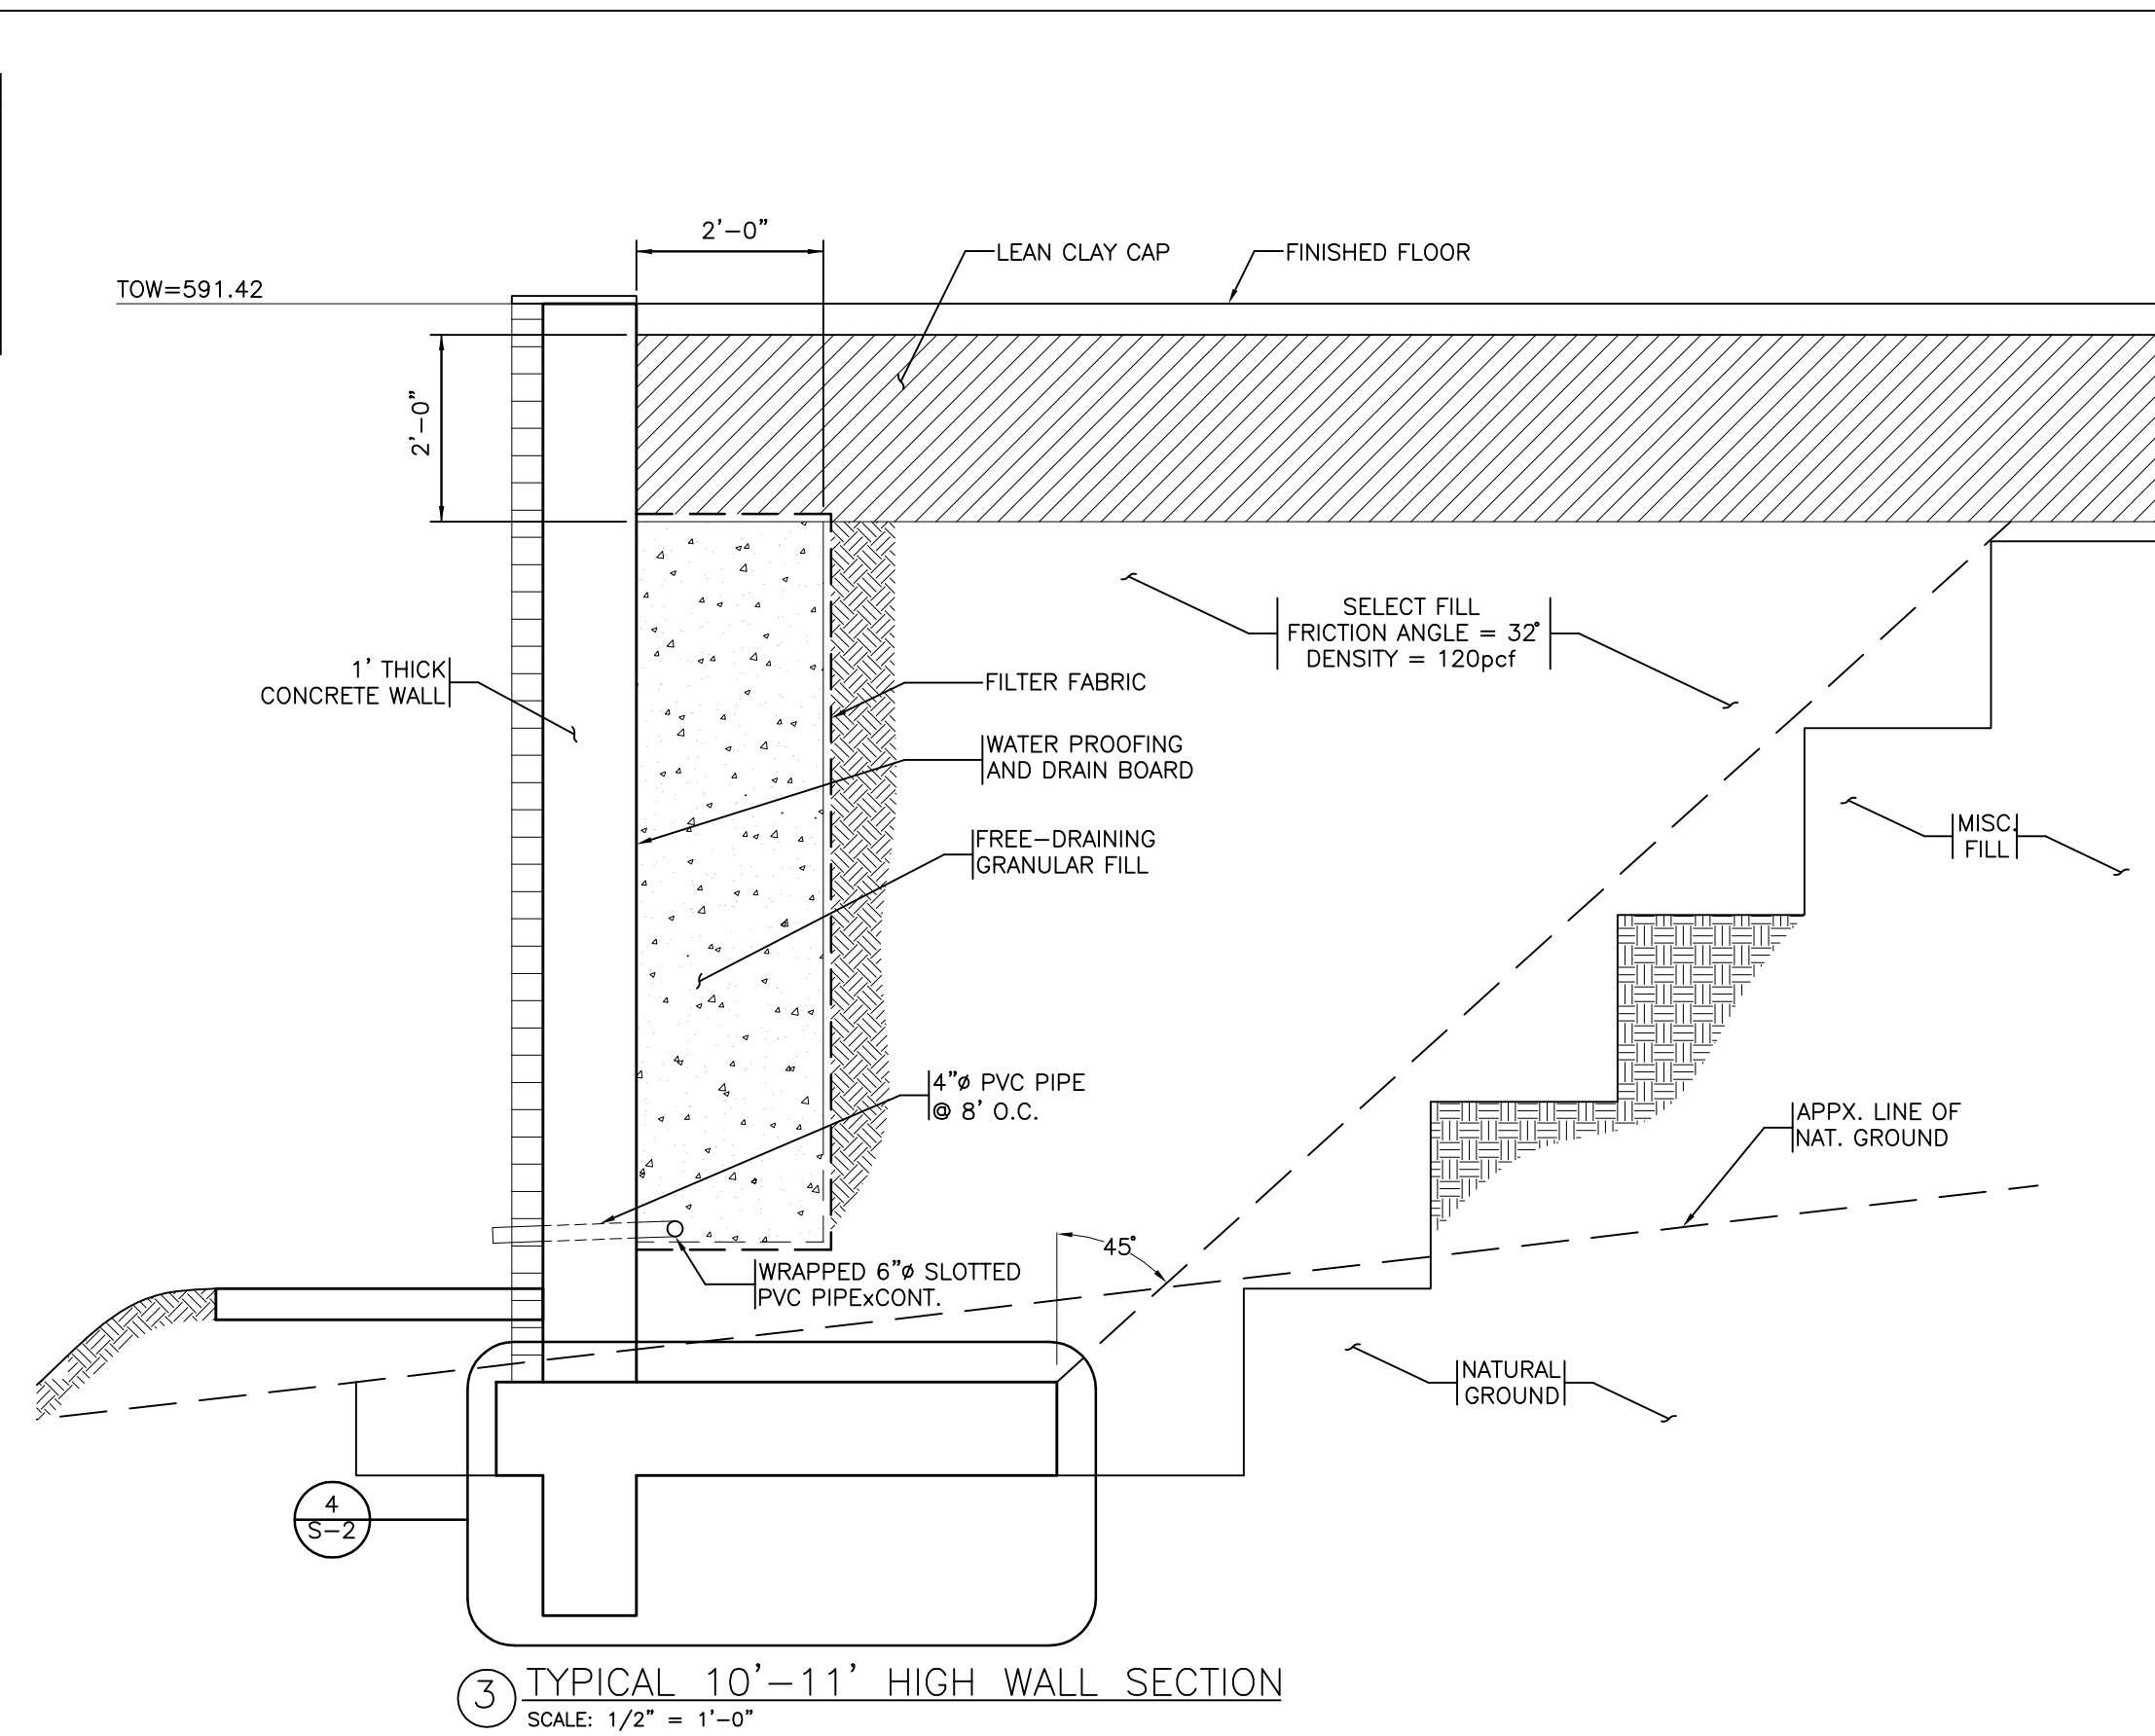


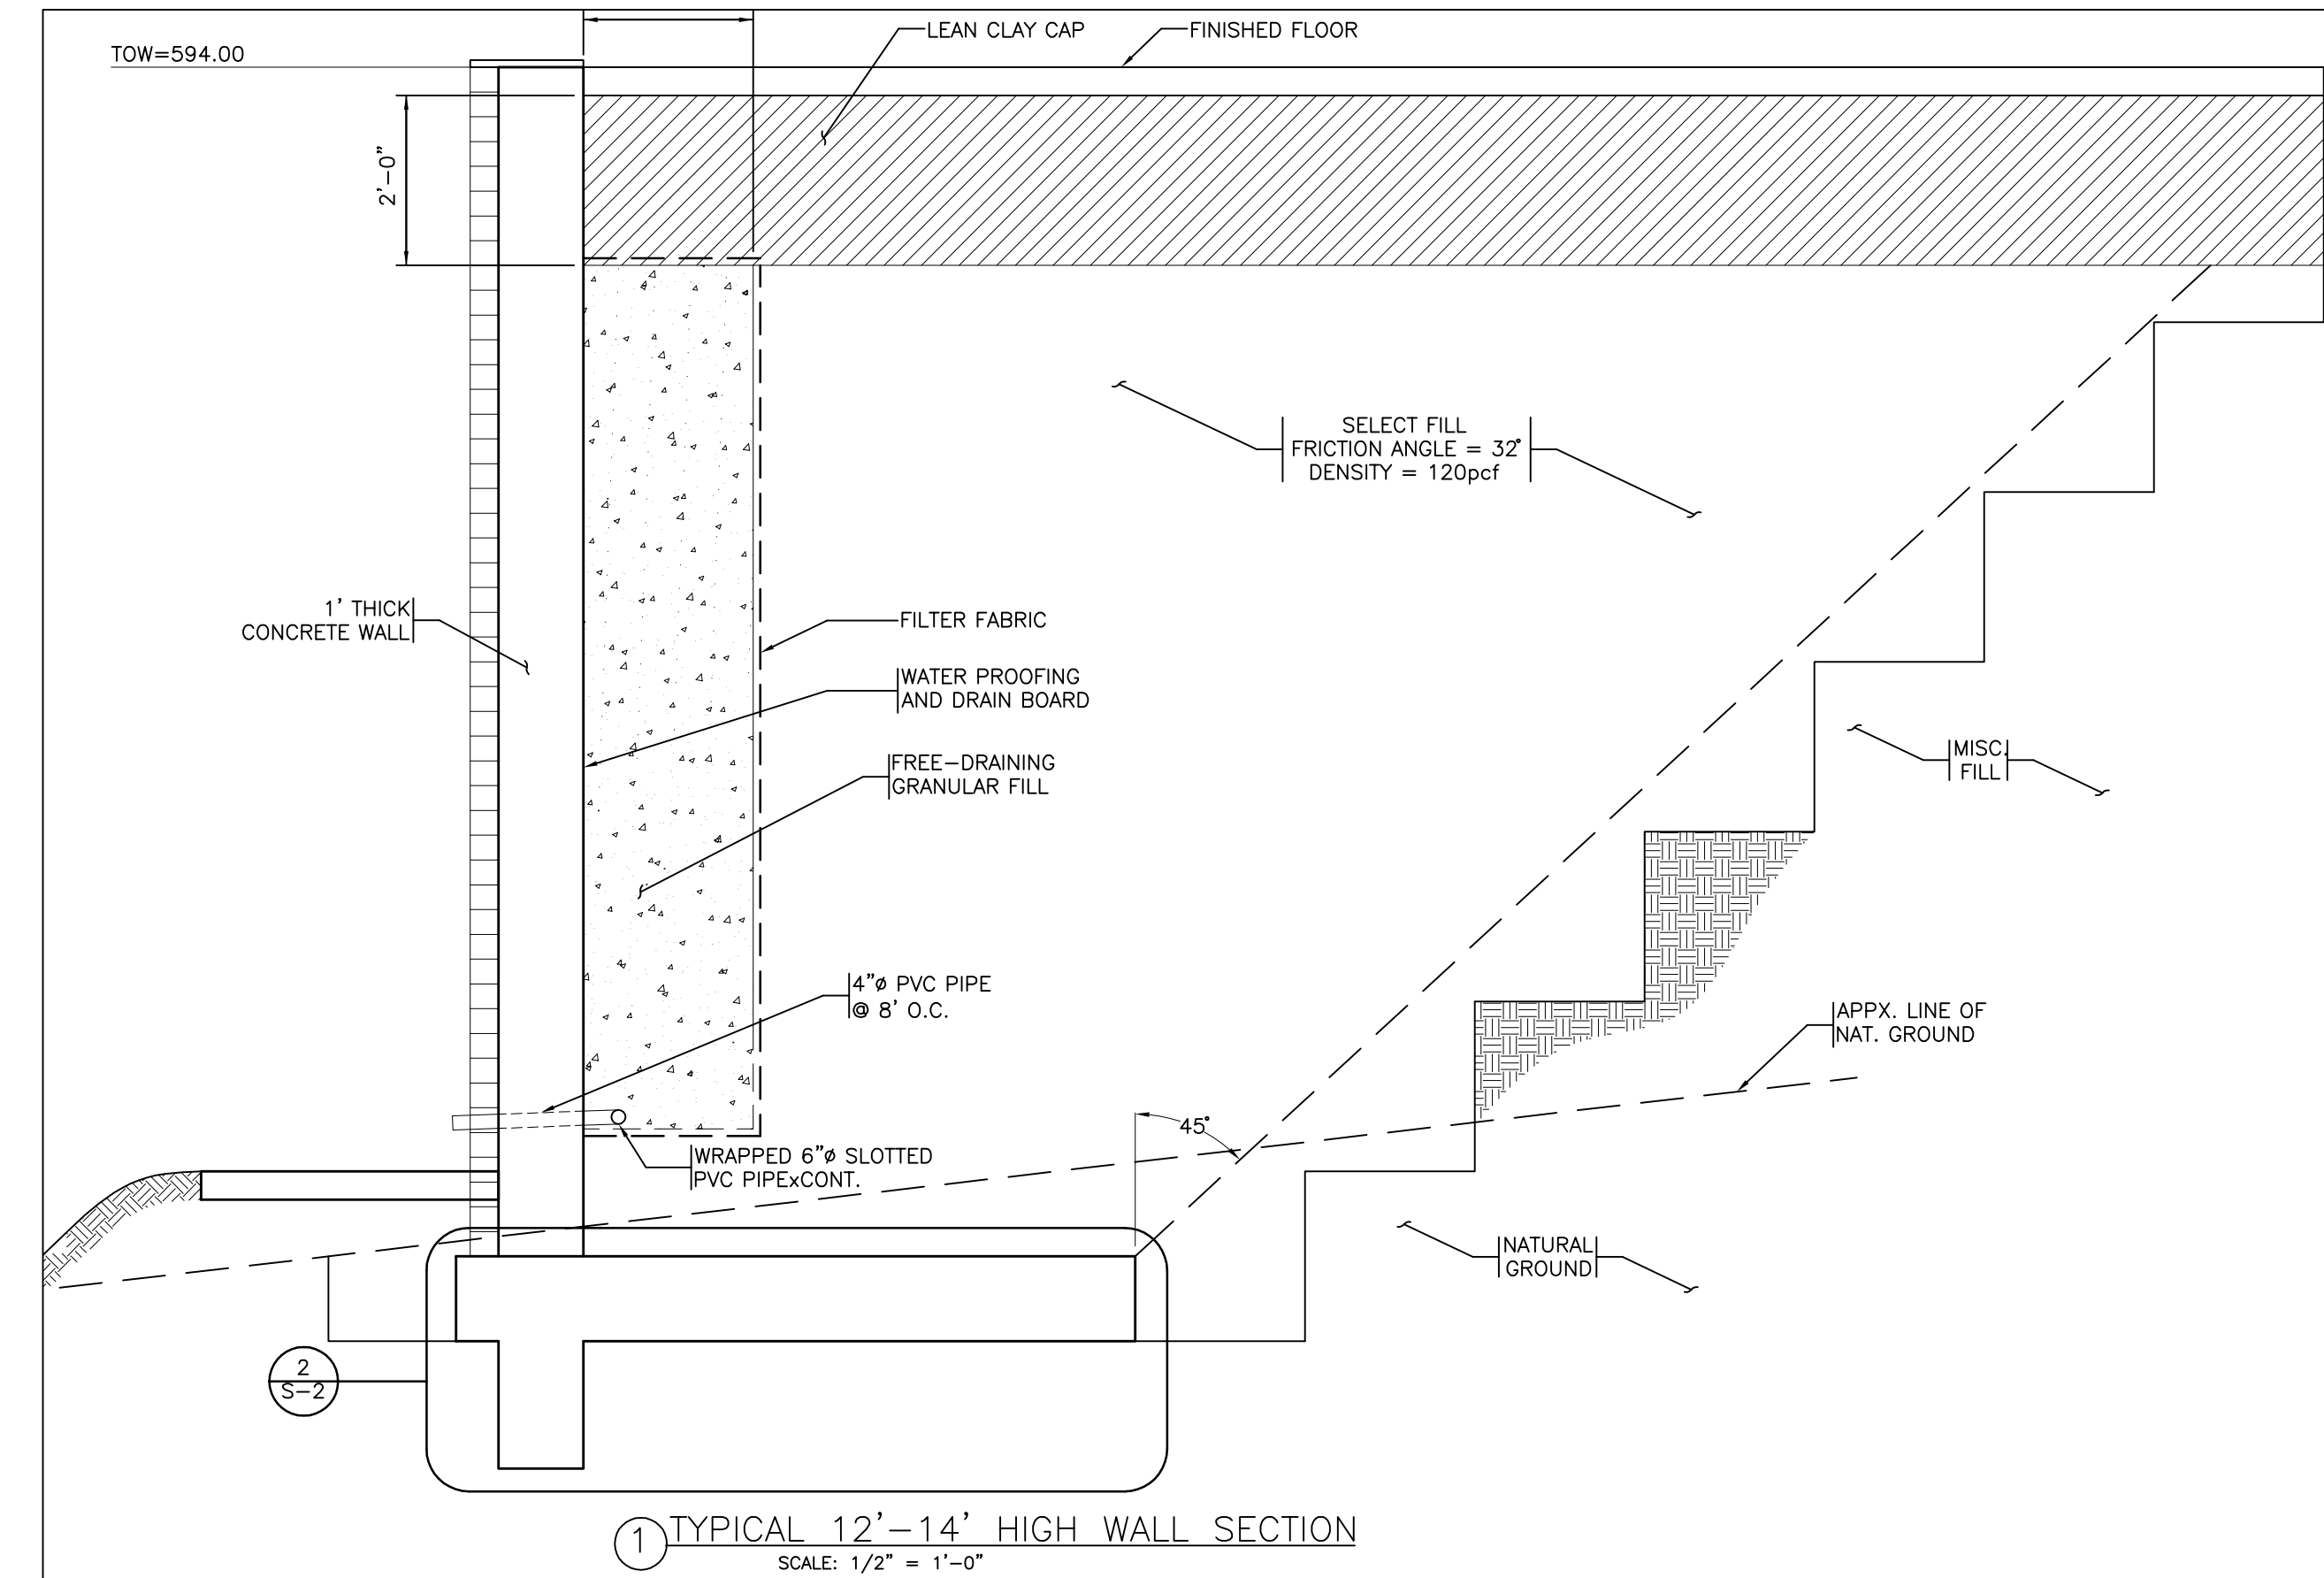

H	B	a	b	X	Y	Z
2'-0"	1'-10"	0'-6"	0'-6"	#3	#3	#3 L BARS 1'-8"
3'-0"	2'-10"	1'-0"	1'-0"	#3	#3	#3 L BARS 2'-0"
4'-0"	3'-4"	1'-2"	1'-4"	#3	#3	#3 L BARS 3'-0"
5'-0"	4'-2"	1'-4"	2'-0"	#4	#4	#4 L BARS 3'-6"
6'-0"	4'-8"	1'-6"	2'-4"	#4	#4	#4 L BARS 4'-0"
7'-0"	5'-2"	1'-8"	2'-8"	#4	#4	#4 L BARS 4'-6"
8'-0"	5'-8"	1'-10"	3'-0"	#4	#4	#4 L BARS 5'-0"
9'-0"	6'-2"	2'-0"	3'-4"	#4	#4	#4 L BARS 5'-6"

GENERAL NOTES

EARTHWORK

1. ALL EARTHWORK AND SUBGRADE PREPARATION SHALL BE PERFORMED IN ACCORDANCE WITH GEE CONSULTANTS, INC.; 10046 MONROE DRIVE; DALLAS, TEXAS 75229; (214) 352-5433; PROJECT NUMBER Y-107-0141; DATED JUNE 18, 2007.

2. FREE DRAINING GRANULAR FILL SHALL BE 6" TO 8" OF FREE DRAINING, UNIFORMLY GRADED, GRANULAR MATERIAL, WITH LESS THAN 5 PERCENT PASSING A NO. 200 SIEVE.

3. SELECT FILL SHALL BE CLAYEY SANDS FREE OF ORGANIC MATERIALS, SHALL HAVE A PLASTICITY INDEX (PI) BETWEEN 4 AND 15, A LIQUID LIMIT OF 40 OR LESS, AND BETWEEN 20 TO 45 PERCENT PASSING A NO. 200 SIEVE. THE SELECT FILL SHALL BE PLACED IN MAXIMUM LOOSE LIFTS OF 8 TO 9 INCHES AT A MOISTURE CONTENT RANGING FROM -3 TO +3 PERCENTAGE POINTS OF ITS OPTIMUM MOISTURE CONTENT AS DETERMINED BY THE STANDARD PROCTOR PROCEDURE, ASTM D-698, AND COMPACTED BETWEEN 95 AND 100 PERCENT OF ITS MAXIMUM DRY DENSITY. PRIOR TO PLACING ANY FILL MATERIAL, ALL EXISTING SURFACE VEGETATION, LOOSE FILL, DELETERIOUS MATERIALS, AND DEBRIS SHALL BE REMOVED; EXISTING FILL AND NATURAL MATERIALS CONSISTING OF BROWN & DARK CLAYS W/ OCCASIONAL ROOTS, CALCAREOUS NODULES AND TAN LIMESTONE FRAGMENTS SHALL BE REMOVED, DOWN TO THE TAN OLIVE BROWN SANDY SILTY CLAY. THIS SUBGRADE SHALL THEN BE SCARIFIED, MOISTENED, AND COMPACTED WITH A SHEEPS-FOOT ROLLER IMMEDIATELY BEFORE PLACING SELECT FILL MATERIALS.

4. FILTER FABRIC SHALL BE MIRAFI 160N OR EQUAL.

5. DRAIN BOARD SHALL BE MIRADRAIN G100N OR EQUAL.

CONCRETE

1. ALL CONCRETE SHALL UTILIZE CRUSHED LIMESTONE AGGREGATE, 5 SACKS OF CEMENT PER C.Y., WITH A SLUMP NOT EXCEEDING 5 INCHES WHEN PLACED, AND NOT OVER 1-1/2 HOURS IN THE TRUCK AFTER BATCHING. CONCRETE SHALL DEVELOP A MINIMUM COMPRESSIVE STRENGTH OF 3,000 PSI AT 28 DAYS.

2. MAXIMUM SIZE OF COARSE AGGREGATE SHALL BE 1 1/2".

3. ALL CONCRETE SHALL BE DESIGNED, MIXED, TRANSPORTED, AND PLACED IN ACCORDANCE WITH THE LATEST SPECIFICATIONS OF THE AMERICAN CONCRETE INSTITUTE.

REINFORCEMENT

1. ALL DOWELS AND #3 BARS SHALL CONFORM TO ASTM SPECIFICATION A615, GRADE 40. ALL OTHER REINFORCING STEEL SHALL CONFORM TO ASTM A615, GRADE 60.

2. ALL REINFORCEMENT SHALL BE DESIGNED AND DETAILED IN ACCORDANCE WITH THE LATEST EDITION OF THE ACI "MANUAL OF STANDARD PRACTICE FOR DETAILING CONCRETE STRUCTURES" (ACI 315).

3. ALL REINFORCING BAR BENDS SHALL BE MADE COLD. GRADE 60 BARS MAY BE BENT IN THE FIELD ONE TIME ONLY.

4. HOOK ALL BEAM BARS AT DISCONTINUOUS ENDS.

5. ALL HOOKS SHALL BE ACI STANDARD 90 DEGREE HOOKS UNLESS DETAILED OTHERWISE.

6. REINFORCEMENT IN FOUNDATION SHALL BE SUPPORTED TO PROVIDE THE FOLLOWING MINIMUM CONCRETE COVER:

-CAST AGAINST AND PERMANENTLY EXPOSED TO EARTH: 3 INCHES

-FORMED, EXPOSED TO EARTH OR WEATHER: 2 INCHES






7. ALL BAR LENGTH AND DIMENSIONS ARE OUT-TO-OUT AND DO NOT INCLUDE HOOKS AND BENDS.

8. STIRRUPS OF THE SIZE AND SPACING SCHEDULED SHALL PROVIDE THE COVER LISTED ABOVE. HOOKS ON STIRRUPS SHALL BE 90 DEGREES AND SHALL HAVE 4 INCH MINIMUM EXTENSIONS.

9. SPLICE LENGTHS FOR ALL BARS SHALL BE A LENGTH EQUAL TO AN ACI CLASS B TENSION SPLICE FOR THE BAR SIZES USED PER THE CHART BELOW. WHERE SPLICES ARE REQUIRED INSLAB REINFORCEMENT, BARS SHALL BE SPLICED AT QUARTER POINTS BETWEEN MAJOR INTERSECTING BEAMS. SPLICES FOR REINFORCEMENT IN BEAM REINFORCING SHALL BE MADE AT THE QUARTER POINTS BETWEEN INTERSECTING BEAMS, AND TOP BAR SPLICES SHALL BE STAGGERED TO BOTTOM BAR SPLICES.

BAR SIZE	SPLICE LENGTH
#3	1'-4"
#4	1'-10"
#5	2'-3"
#6	2'-11"
#7	4'-0"

10. CORNER BARS SHALL BE USED AT ALL BEAM CORNERS AND INTERSECTIONS. CORNER BARS SHALL BE THE SAME BAR SIZE AS THE BEAM REINFORCEMENT, AND EACH SHALL BE EQUAL TO THE LENGTH SHOWN IN THE CHART ABOVE. SEE THE TYPICAL CORNER BAR DETAIL ON SHEET S-5 FOR PLACEMENT OF CORNER BARS.

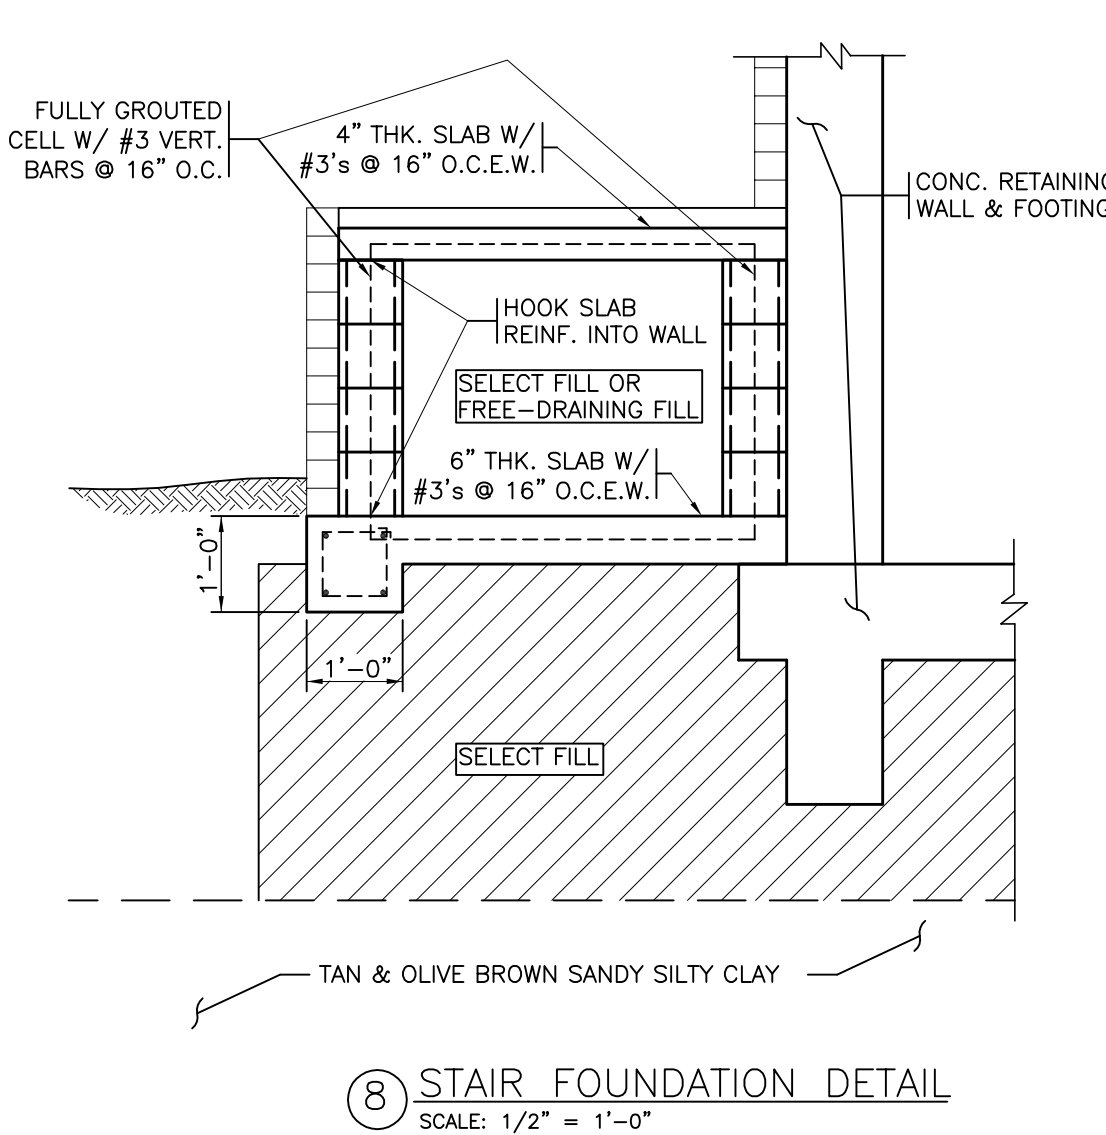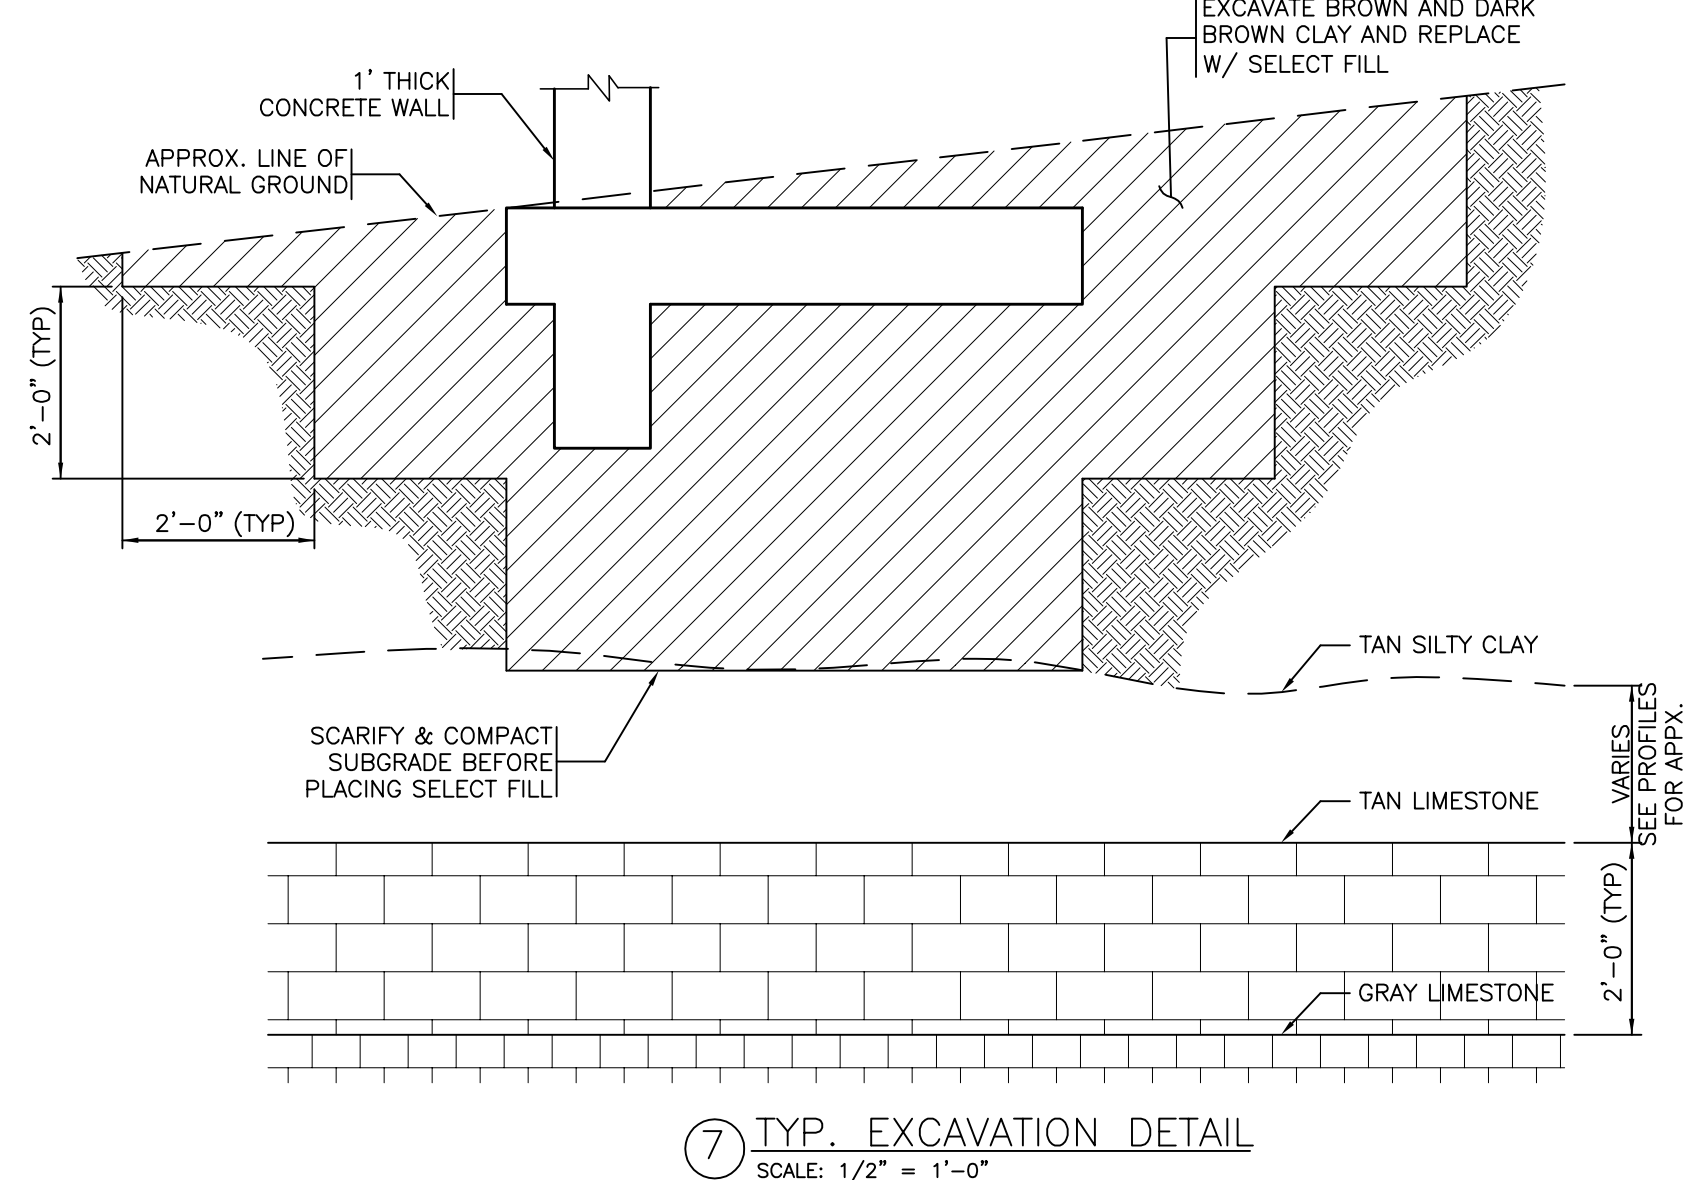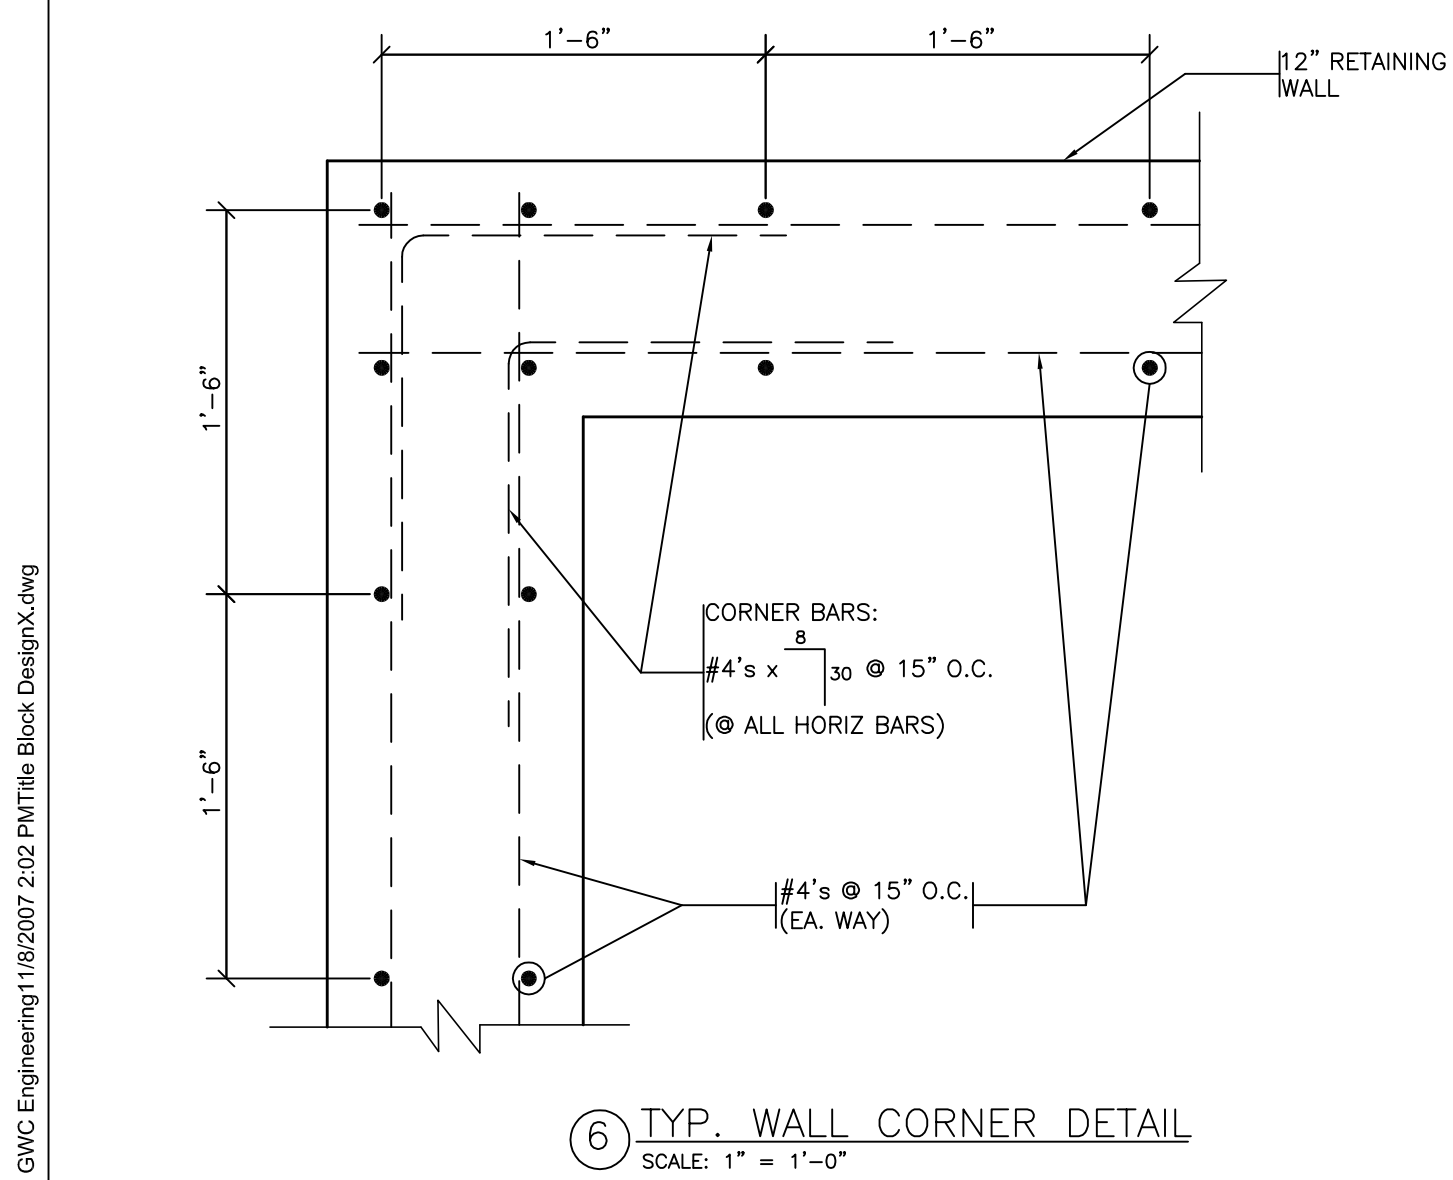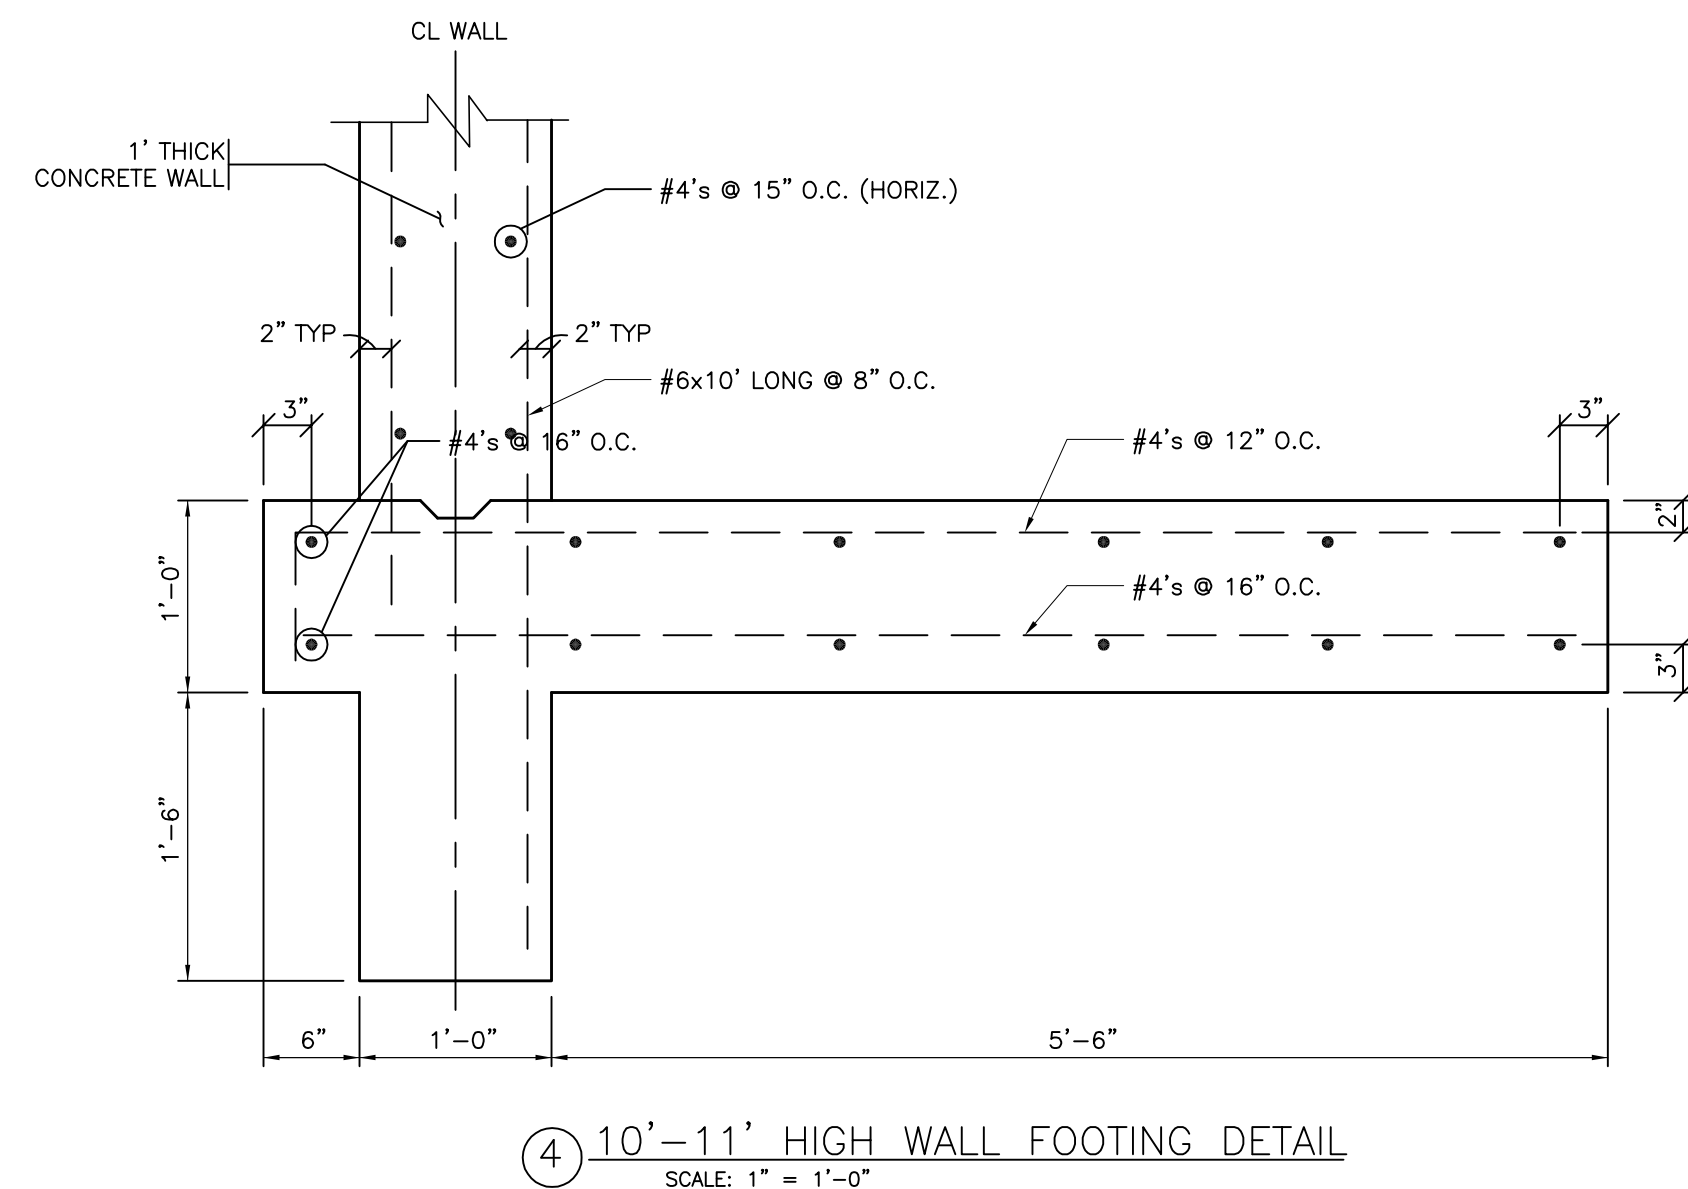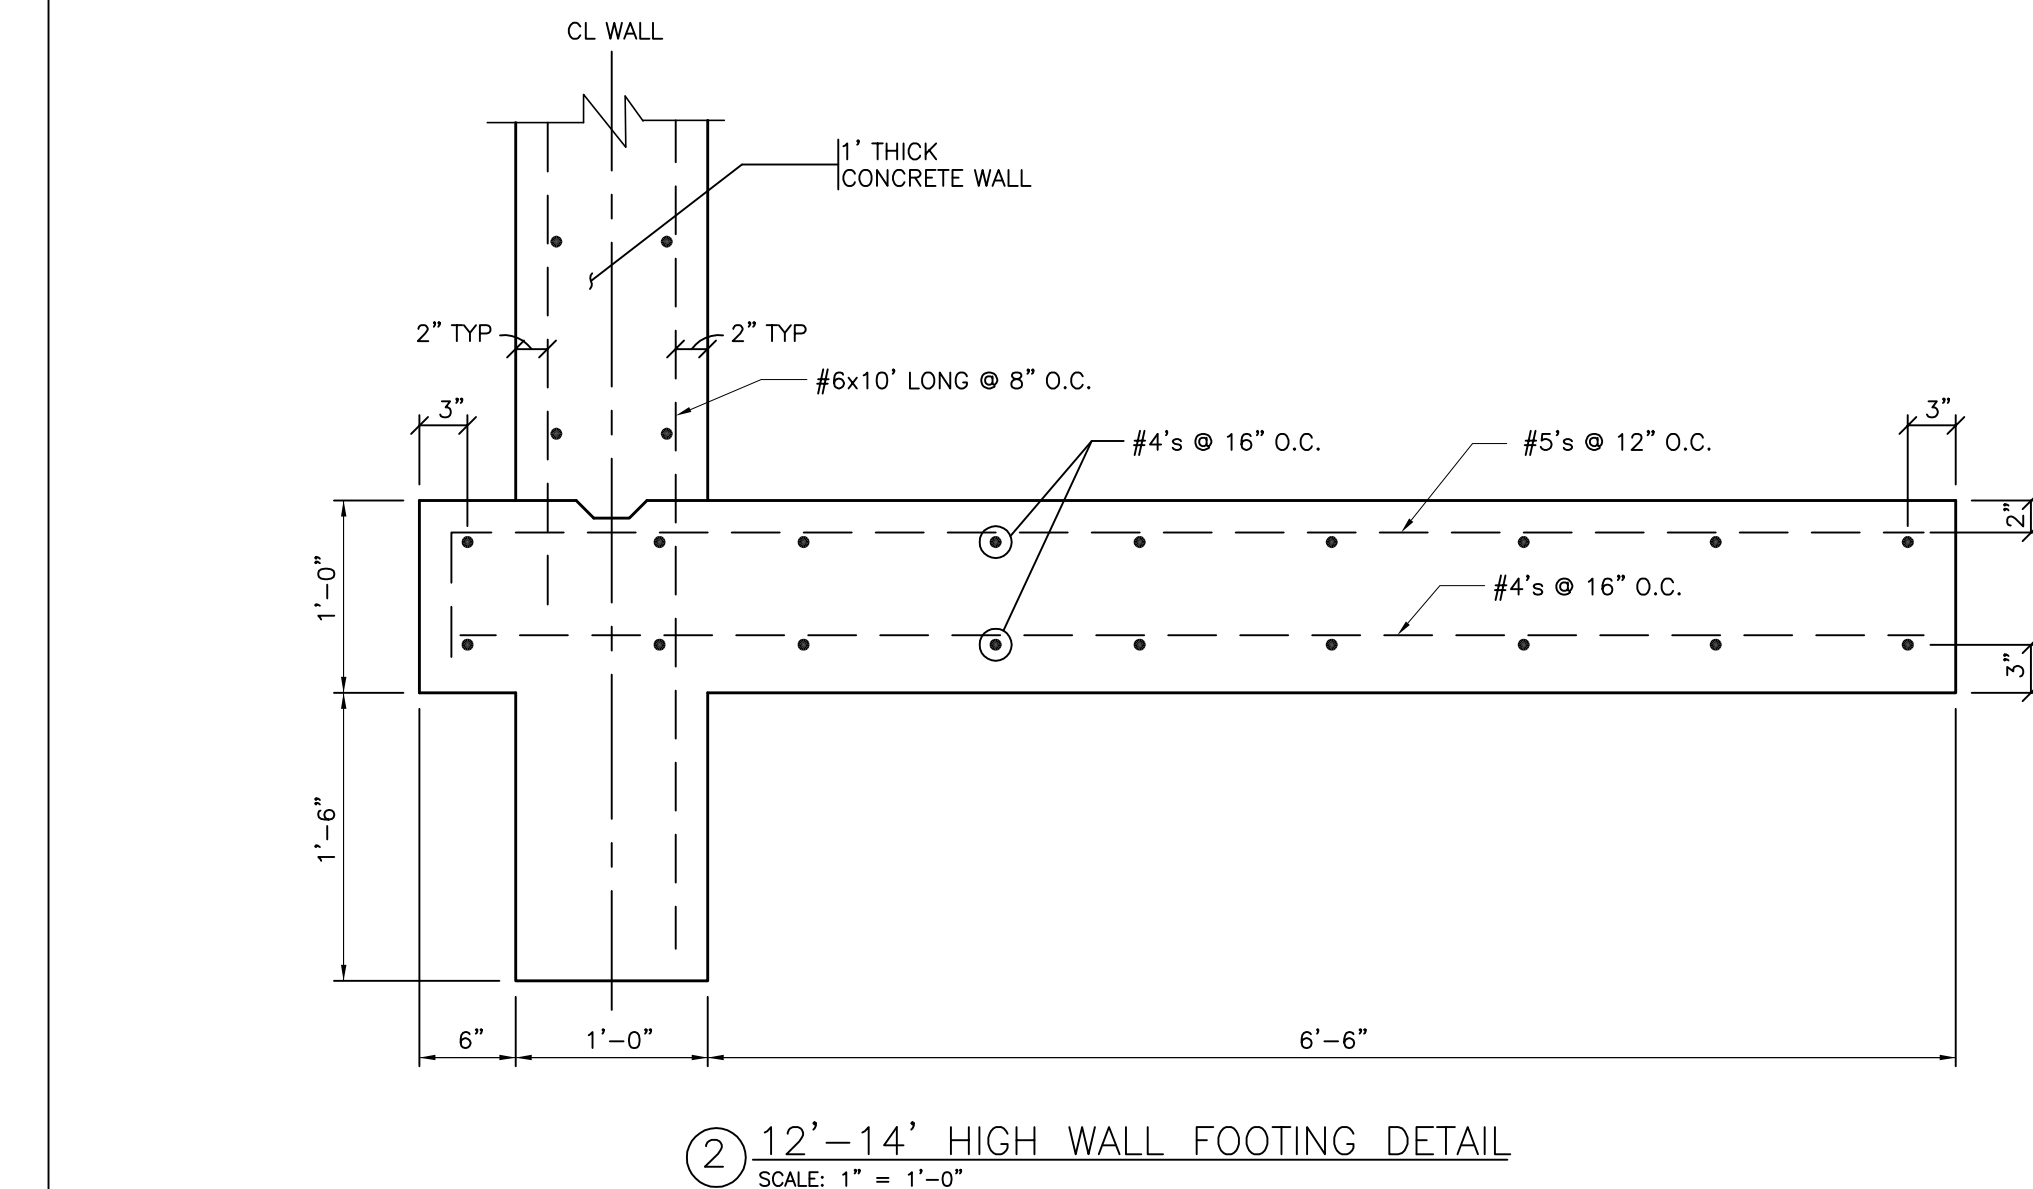

Need your project to look like this?

Ira can do it

iracad
Consulting & Design

Contact Us

214-717-8407
ira@iracad.com

This design is the intellectual property of iracad Consulting and Design and is provided for reference only. Unauthorized reproduction, distribution, or use in any form without written permission is strictly prohibited. All rights reserved.